Downloaded from http://www.everyspec.com

FED SUP CLASS
5940

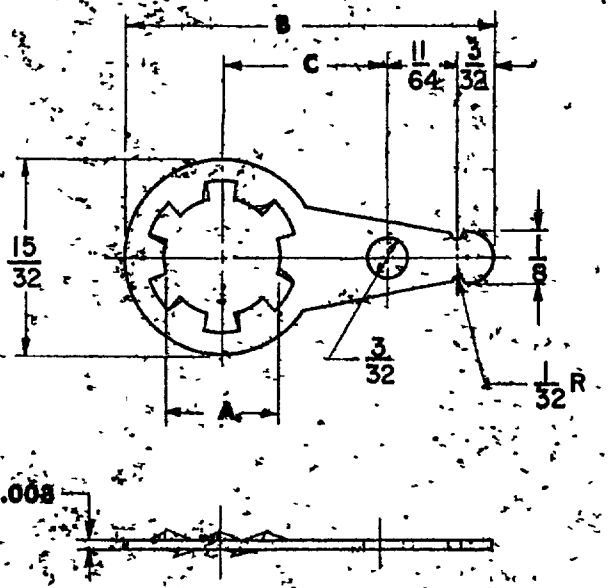

DASH NUMBER	SCREW SIZE	HOLE DIA A MAX	HOLE DIA A MIN	B	C	AWG SIZE
1	10	.208	.193	57/64	.397	22 TO 20
2	1/4	.285	.258	57/64	.397	

MATERIAL: PHOSPHOR BRONZE (1.25% TIN), GRADE E, NO. 502.

FINISH: HOT TIN DIP OR ELECTRO-DEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005.

NOTES:
1. ALL DIMENSIONS IN INCHES, TOLERANCE FRACTIONAL ±1/64, UNLESS OTHERWISE SPECIFIED.
2. MAXIMUM BURR OF .005 IS ALLOWABLE.
3. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. MU Other Cust SH 11	TITLE TERMINAL, LUG, SOLDER TYPE, PHOSPHOR BRONZE STAMPING, LOCKING TYPE FLAT, ONE HOLE	MILITARY STANDARD MS 77073	
PROCUREMENT SPECIFICATION MIL-T-19659	SUPERSEDES	SHEET 1 OF	

DD FORM 1 SEP 67 672-1 (Coordinated)

REVIEW INTEREST ARMY MU NAVY: SH AF: 11 USER INTEREST ARMY: MO NAVY: MC

APPROVED 30 OCT 67 REVISED

NOTICE — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory for all new engineering and design applications and for repetitive use of parts from this document.